





EXTERIOR  
**BLINDS**



SETTA



ZETTA



CETTA

... protecting your privacy.

# EXTERIOR BLINDS

SETTA, ZETTA, CETTA

Exterior blinds create an optimal environment regarding light and temperature conditions and are an important part of the building in terms of energy savings. Within the traditional approach, the exterior blinds fulfil the shading and safety function. As for the non-traditional concept, they represent an architectural element of office buildings and are a jewel of family houses.

## ADVANTAGES AND BENEFITS OF EXTERIOR BLINDS

HIGH DEGREE OF PROTECTION AGAINST SOLAR RADIATION.

EFFECTIVE PROTECTION OF PRIVACY.

REDUCTION OF HEAT ALREADY IN THE EXTERIOR.

REDUCTION OF THE AMBIENT NOISE LEVEL.

DESIGN AND ARCHITECTURAL ELEMENT OF THE FAÇADE.



EXTERIOR BLINDS SETTA



SETTA 65



SETTA 90

EXTERIOR BLINDS ZETTA



ZETTA 70



ZETTA 90

EXTERIOR BLINDS CETTA



CETTA 50



CETTA 65



CETTA 80



**ISOTRA** Quality

## Legend



handle



cord



remote control



switch



sensor sun/wind

... protecting your privacy.



# BLINDS SETTA

*... combination of elegance and practicality.*

The exterior blind Setta is a leader in exterior shading with regard to efficiency and design. S-shaped slats create a perfect compact surface when closed. Effectiveness of the exterior blind Setta is strengthened by its raceful appearance.



The thermoregulatory effect of the blind Setta is enhanced by a rubber piece pressed-in along the whole slat length. Aluminium guidance channels provide stability of the outside blind under windy conditions and serve as a supporting element for securing the house against burglary. A variability of assembly, elegance and perfect shading make this exterior horizontal blind a unique shielding element suitable for all types of objects.

| Standard dimensions: |            |       |             |                           |        |                  |                 |
|----------------------|------------|-------|-------------|---------------------------|--------|------------------|-----------------|
|                      | WIDTH [mm] |       | HEIGHT [mm] | SURFACE [m <sup>2</sup> ] |        | GUIDANCE ELEMENT |                 |
|                      | min.       | max.  | max.        | cord                      | handle |                  |                 |
| SETTA 65             | 600        | 4 000 | 4 000       | -                         | 8      | 16               | guiding channel |
| SETTA 90             | 600        | 4 000 | 4 000       | -                         | 8      | 16               | guiding channel |

## Advantages of the Setta blind

- Elegant design with S-shaped slats.
- Dual width of slats: 65 mm and 90 mm.
- High degree of shading.
- Thermoregulatory as well as protective effect.
- Reduction of the ambient noise level.
- Bottom rail from extruded aluminium.
- Possibility of electrical control.
- Reduced blind noise (rubber piece pressed-in along the whole blind length).
- Maximum surface guaranteed: 16 m<sup>2</sup>.

## Control

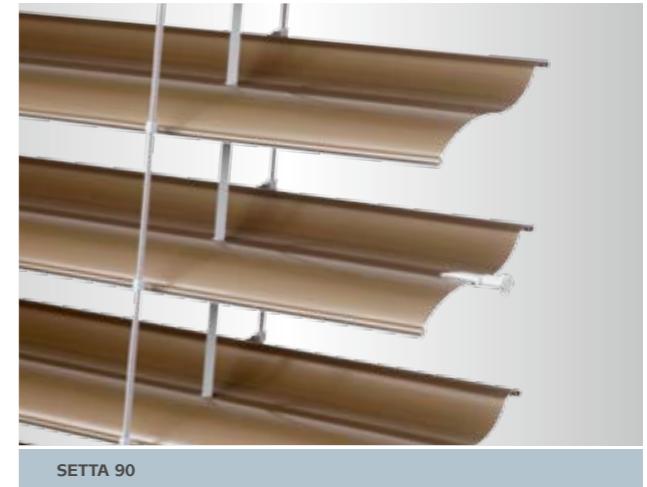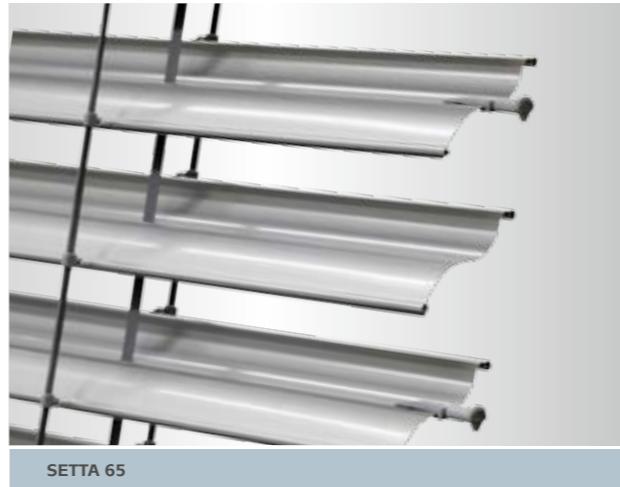

|          | HEAD RAIL                |                | BOTTOM RAIL  | SLAT         | SIDE GUIDANCE   | LADDER        | TEXTILE TAPE  |
|----------|--------------------------|----------------|--------------|--------------|-----------------|---------------|---------------|
| SETTA 65 | Fe, 56 x 58              | Al, 58 x 60    | Al, 67 x 13  | Al, 65 mm    | guiding channel | PES, 60 x 9,5 | PES, 8 x 0,34 |
| SETTA 90 | Fe, 56 x 58              | Al, 58 x 60    | Al, 93 x 14  | Al, 90 mm    | guiding channel | PES, 86 x 9,5 | PES, 8 x 0,34 |
| COLOUR   | zinc-coated, sheet metal | pure aluminium | anodized Al. | from sampler | anodized        | grey          | grey          |



# BLINDS ZETTA

*... passion for modern design.*

The exterior blind Zetta is the most technologically advanced exterior blind suitable for shading family houses as well as office buildings. Z-shaped slats ensure perfect shading and have a modern feel.


The thermoregulatory effect of the blind Zetta is enhanced by a rubber piece pressed-in along the whole slat length. Aluminium guidance channels provide stability of the outside blind under windy conditions and serve as a supporting element for securing the house against burglary. A variability of assembly, elegance and perfect shading make this exterior horizontal blind a unique shielding element suitable for all types of objects.

| Standard dimensions: |            |       |             |                           |        |                  |                 |
|----------------------|------------|-------|-------------|---------------------------|--------|------------------|-----------------|
|                      | WIDTH [mm] |       | HEIGHT [mm] | SURFACE [m <sup>2</sup> ] |        | GUIDANCE ELEMENT |                 |
|                      | min.       | max.  | max.        | cord                      | handle |                  |                 |
| ZETTA 70             | 600        | 4 000 | 4 000       | -                         | 8      | 16               | guiding channel |
| ZETTA 90             | 600        | 4 000 | 4 000       | -                         | 8      | 16               | guiding channel |

## Advantages of the Zetta blind

- Modern design with Z-shaped slats,
- Dual width of slats: 70 mm and 90 mm,
- High degree of shading.
- Thermoregulatory as well as protective effect.
- Reduction of the ambient noise level.
- Bottom rail from extruded aluminium,
- Possibility of electrical control,
- Reduced blind noise (rubber piece pressed-in along the whole blind length),
- Maximum surface guaranteed: 16 m<sup>2</sup>.

## Control

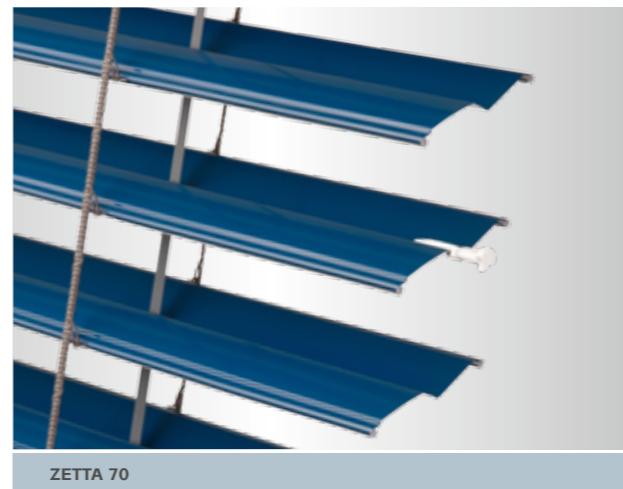

|          | HEAD RAIL                |                | BOTTOM RAIL  | SLAT         | SIDE GUIDANCE   | LADDER        | TEXTILE TAPE  |
|----------|--------------------------|----------------|--------------|--------------|-----------------|---------------|---------------|
| ZETTA 70 | Fe, 56 x 58              | Al, 58 x 60    | Al, 67 x 13  | Al, 70 mm    | guiding channel | PES, 60 x 9,5 | PES, 8 x 0,34 |
| ZETTA 90 | Fe, 56 x 58              | Al, 58 x 60    | Al, 93 x 14  | Al, 90 mm    | guiding channel | PES, 80 x 9,5 | PES, 8 x 0,34 |
| COLOUR   | zinc-coated, sheet metal | pure aluminium | anodized Al. | from sampler | anodized        | grey          | grey          |



# BLINDS CETTA

*... practical variations.*

The exterior blind Cetta is a favorite type for shading family houses and office buildings. We offer this type in many design versions. Flexi system or Slim system features a lower lap height while the Duo system is characterized by different tilting of slats in the top and bottom blind part.



| Standard dimensions: |            |       |             |                           |        |                  |                      |
|----------------------|------------|-------|-------------|---------------------------|--------|------------------|----------------------|
|                      | WIDTH [mm] |       | HEIGHT [mm] | SURFACE [m <sup>2</sup> ] |        | GUIDANCE ELEMENT |                      |
|                      | min.       | max.  | max.        | cord                      | handle | motor            |                      |
| CETTA 50             | 400        | 3 150 | 3 000       | 6                         | 8      | 10               | -/wire               |
| CETTA 65             | 600        | 4 000 | 4 000       | -                         | 8      | 16               | wire/guiding channel |
| CETTA 80             | 600        | 4 000 | 4 000       | -                         | 8      | 16               | wire/guiding channel |

Aluminium guidance channels provide stability of the blind under windy conditions and serve as a supporting element for securing the house against burglary. A variability of assembly as well as design makes this exterior horizontal blind a practical shielding element suitable for all types of objects.

## Advantages of the Cetta blind

- Variability of the slat width: 50 mm, 65 mm, 80 mm,
- Variability of the design: Duo system, Slim system, Flexi system,
- High degree of shading.
- Thermoregulatory as well as protective effect.
- Reduction of the ambient noise level,
- Bottom rail from extruded aluminium,
- Possibility of electrical control,
- Maximum surface guaranteed: 16 m<sup>2</sup>.

## Control

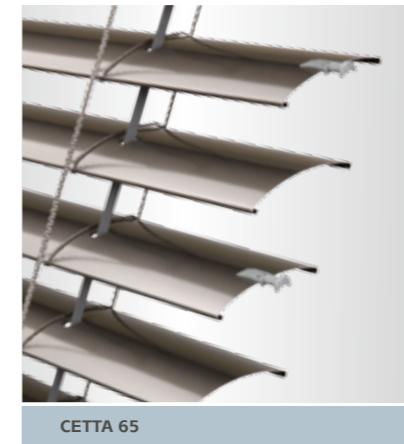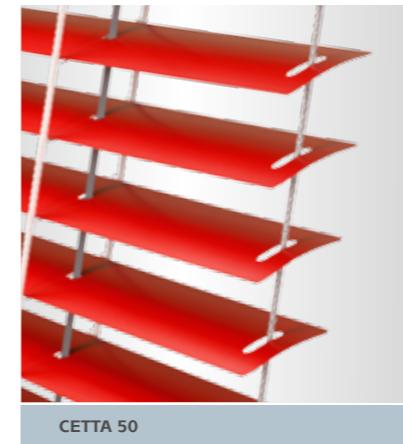

|                     | HEAD RAIL                   | BOTTOM RAIL       | SLAT        | SIDE GUIDANCE | LADDER                              | TEXTILE TAPE  |
|---------------------|-----------------------------|-------------------|-------------|---------------|-------------------------------------|---------------|
| CETTA 50            | Fe, 40 x 40*                | Al, 58 x 60       | Fe, 49 x 12 | Al, 50 mm     | Fe/PVC wire ø 2,2                   | PES, 42 x 54  |
| CETTA 65            | Fe, 56 x 58                 | Al, 58 x 60       | Al, 67 x 13 | Al, 65 mm     | Fe/PVC wire ø 3,2                   | PES, 60 x 70  |
| CETTA 80            | Fe, 56 x 58                 | Al, 58 x 60       | Al, 80 x 13 | Al, 80 mm     | guiding channel (anodized)          | PES, 68 x 85  |
| CETTA 80 - SLIM     | Fe, 56 x 58                 | Al, 58 x 60       | Al, 80 x 13 | Al, 80 mm     | PES, 68 x 85                        | PES, 8 x 0,34 |
| CETTA 80 - FLEXI    | Fe, 56 x 58                 | Al, 58 x 60       | Al, 80 x 13 | Al, 80 mm     | Fe/PVC wire ø 2,2                   | PES, 68 x 85  |
| colour CETTA 50     | RAL 9003, RAL 9006          |                   |             | from sampler  | grey                                |               |
| colour CETTA 65, 80 | zinc-coated,<br>sheet metal | pure<br>aluminium | anod. alu.  | from sampler  | wire-grey; guiding<br>channel-anod. | grey          |

\*Control – cord/handle

# BLINDS CETTA

## DESIGN VERSIONS

### SLIM SYSTEM Design version of the blind Cetta 80

MEETS THE LOW LAP HEIGHT REQUIREMENT WHILE MAINTAINING THE STRENGTH OF SLATS.

SPECIFIC ASSEMBLING OF SLATS (SIDE ALTERNATING OVERLAP OF ADJACENT SLATS) WITH MAINTAINING THE POSSIBILITY OF GUIDING BY STRIPS.

CONVENIENT SOLUTION WHEN FACING A LACK OF SPACE FOR THE LAP.



SLIM SYSTEM DETAIL

Packet is the height of the blind pulled up including the head and bottom rail without the blind holder.

|  | PACKET HEIGHT (mm) |     |     |     |     |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |     |     |     |     |     |
|--|--------------------|-----|-----|-----|-----|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-----|-----|-----|-----|-----|
| TYPE                                   | 500                | 600 | 700 | 800 | 900 | 1000 | 1100 | 1200 | 1300 | 1400 | 1500 | 1600 | 1700 | 1800 | 1900 | 2000 | 2100 | 2200 | 2300 | 2400 | 2500 | 2600 | 2700 | 2800 | 2900 | 3000 | 3100 | 3200 | 3300 | 3400 | 3500 | 3600 | 3700 | 3800 | 3900 | 4000 |     |     |     |     |     |
| CETTA 50<br>(guiding channel)          | 130                | 135 | 145 | 160 | 170 | 180  | 190  | 200  | 210  | 220  | 230  | 240  | 250  | 265  | 275  | 280  | 295  | 305  | 315  | 325  | 335  | 350  | 355  | 365  | 380  | 385  | 400  | 410  | 420  | 430  | 440  | 450  | 460  | 470  | 485  | 495  |     |     |     |     |     |
| CETTA 50<br>wire                       | 85                 | 90  | 95  | 100 | 105 | 110  | 115  | 120  | 125  | 130  | 135  | 140  | 145  | 150  | 155  | 160  | 170  | 175  | 180  | 185  | 195  | 200  | 205  | 210  | 215  | 220  | 225  | 230  | 235  | 240  | 245  | 250  | 255  | 260  |      |      |     |     |     |     |     |
| CETTA 65                               | 135                | 145 | 155 | 160 | 165 | 175  | 185  | 190  | 195  | 205  | 215  | 220  | 230  | 235  | 245  | 250  | 260  | 265  | 270  | 280  | 290  | 300  | 310  | 320  | 325  | 335  | 340  | 350  | 355  | 365  | 375  | 385  | 395  | 405  |      |      |     |     |     |     |     |
| Cetta<br>80-Flexi<br>(guiding channel) | 120                | 125 | 130 | 135 | 140 | 145  | 150  | 155  | 160  | 165  | 170  | 175  | 180  | 185  | 190  | 195  | 200  | 205  | 210  | 215  | 220  | 225  | 230  | 235  | 240  | 245  | 250  | 255  | 260  | 265  | 270  | 275  | 280  | 285  | 290  | 295  | 300 | 305 | 310 | 315 | 320 |
| Cetta<br>80-Flexi<br>(wire)            | 110                | 115 | 120 | 125 | 130 | 135  | 140  | 145  | 150  | 155  | 160  | 165  | 170  | 175  | 180  | 185  | 190  | 195  | 205  | 215  | 220  | 225  | 230  | 235  | 240  | 245  | 250  | 255  | 260  | 265  | 270  | 275  | 280  | 285  | 290  | 295  | 300 | 305 | 310 | 315 | 320 |
| CETTA 80<br>Slim                       | 125                | 135 | 145 | 150 | 155 | 160  | 165  | 170  | 175  | 185  | 190  | 195  | 205  | 215  | 220  | 230  | 240  | 245  | 250  | 260  | 265  | 275  | 285  | 290  | 300  | 305  | 310  | 320  | 330  | 335  | 345  | 355  | 365  | 375  | 385  | 390  | 400 | 405 |     |     |     |
| CETTA 65                               | 135                | 145 | 150 | 160 | 170 | 175  | 185  | 190  | 195  | 205  | 215  | 220  | 230  | 235  | 245  | 250  | 260  | 265  | 270  | 275  | 280  | 290  | 295  | 300  | 310  | 315  | 320  | 330  | 335  | 345  | 355  | 365  | 375  | 385  | 390  | 400  | 405 |     |     |     |     |
| CETTA 90                               | 125                | 135 | 140 | 145 | 150 | 155  | 160  | 165  | 170  | 175  | 180  | 185  | 190  | 195  | 205  | 210  | 215  | 225  | 230  | 235  | 240  | 250  | 255  | 260  | 265  | 270  | 275  | 280  | 285  | 290  | 295  | 300  | 305  | 310  | 315  | 320  |     |     |     |     |     |
| ZETTA 70                               | 135                | 140 | 145 | 150 | 155 | 160  | 165  | 170  | 175  | 180  | 185  | 190  | 195  | 205  | 210  | 215  | 225  | 230  | 235  | 240  | 250  | 255  | 260  | 265  | 270  | 275  | 280  | 285  | 290  | 295  | 300  | 305  | 310  | 315  | 320  |      |     |     |     |     |     |
| ZETTA 90                               | 125                | 135 | 140 | 145 | 150 | 155  | 160  | 165  | 170  | 175  | 180  | 185  | 190  | 195  | 205  | 210  | 215  | 225  | 230  | 235  | 240  | 250  | 255  | 260  | 265  | 270  | 275  | 280  | 285  | 290  | 295  | 300  | 305  | 310  | 315  | 320  |     |     |     |     |     |

### DUO SYSTEM Design version of the blind Cetta 65, Cetta 80 and Cetta 80-Flexi


ALLOWS SPLITTING THE BLIND INTO TWO PARTS WITH DIFFERENT SLAT TILTING.

PROVIDES A MUCH GREATER VARIABILITY OF SHADING.

RECOMMENDED SOLUTION TO OFFICE BUILDINGS, TRAINING ROOMS OR CONFERENCE HALLS.



DUO SYSTEM

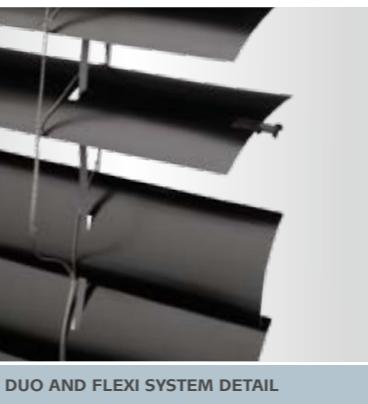

DUO AND FLEXI SYSTEM DETAIL

### FLEXI SYSTEM Design version of the blind Cetta 80

LOW LAP HEIGHT IN COMPARISON WITH THE BLIND CETTA 80 ACHIEVED BY USING SLATS WITHOUT THE LONGITUDINAL BEND.

CONVENIENT SOLUTION WHEN FACING A LACK OF SPACE FOR THE LAP.

... protecting your privacy.

Note: Regarding motor-driven blinds, the packet height changes by +20 mm (by +40 mm in the case of Cetta 50 with 40x40 head rail; 3000 mm height above 3000 mm is not guaranteed).  
Packet heights in the table relate to blinds guided by the channel (regarding Cetta 50 and Cetta 80-Flexi, the stated data apply both for guidance by channel and wire).



**ISOTRA a.s.**

Bílovecká 2411/1, 746 01 Opava  
Czech Republic

Tel.: +420 **553 685 111**  
Fax: +420 553 685 110  
E-mail: [isotra@isotra.cz](mailto:isotra@isotra.cz)

[www.isotra.cz](http://www.isotra.cz)

Released 08/2013

**ISOTRA Partner**



*...protecting your privacy.*